


LED SPOT LIGHT
SP-F620A



- New narrow beam angle 8° for option, RGBW mode has good mixing effect;
- Double lighting heads and double beam angles design, suit to different building height;
- High voltage input, DMX512/RDM control;
- Datachable bracket for easy installation;
- IP65-IP66; Structural waterproof;



Physical&Installation Dimensions

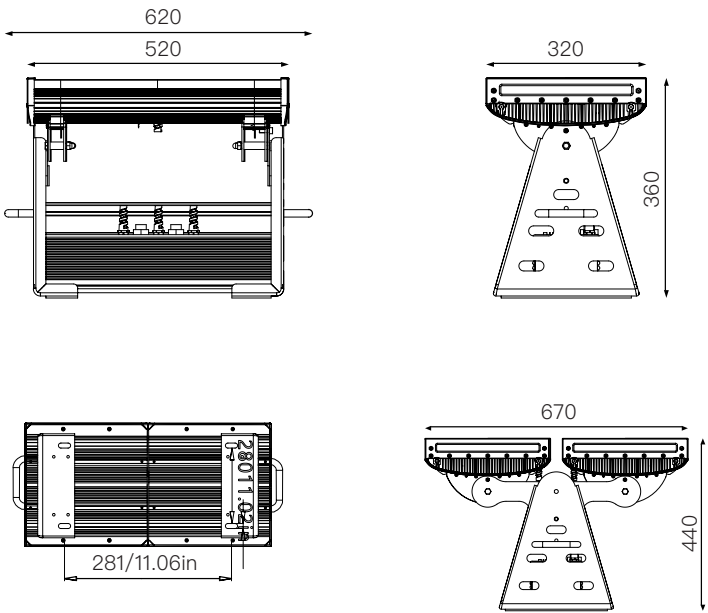

Model Info&Specifications

Model	Length	Power(Max)	Colours	Lumen	Beam Angle	Control	Chips Brand	Package
SP-F620A-72P	L320mm	216W	RGB	11475 lm	15° /30° /45°	 	 	25.5±5%Kg 1 Units/Ctn 59.5*35.5*40CM
SP-F620A-108P	L320mm	216W	2700K/3000K 4000K/6000K R+G+B	12500 lm 13500 lm 7960 lm				25.5±5%Kg 1 Units/Ctn 59.5*35.5*40CM
SP-F620A-144P	L670mm	430W	RGBW	14000 lm				42.5±5%Kg 1 Units/Ctn 70.5*69*50CM
SP-F620A-216P	L670mm	430W	2700K/3000K 4000K/6000K R+G+B	15316 lm 17000 lm 11475 lm				42.5±5%Kg 1 Units/Ctn 70.5*69*50CM
SP-F620A-54P	L320mm	216W	RGBW	5100 lm	8° /10° /12°			42.5±5%Kg
SP-F620A-108P	L670mm	430W	RGBW	13000 lm	20° /24° /36° 60° /10° x30°			

