

LED LAWN LIGHT

ITEM NO. : LL-R180A Series

INSTRUCTION OF LL-R180A

This product is mainly used in community greening, parks, scenic spots and other places. The light projecting distance is 1.2 meter, the product is static color, has white light, static color, warm white light, neutral light and other color optional, fixture color matte black, bright silver and so on.

A. Specification

A-1 Structure

Materials of Shell: Aluminium alloy
 Rotary angle: 120°
 Input Voltage: 240V AC
 Protecting Rating: IP65
 Operating Temperature: -20°C~40°C



A-2 Model Configuration Table

LL-R180A-1P-S


Model	LED Color	LED Quantity	Power Consumption	Size	Weight	✓
LL-R180A-1P-H1	WW,NW,W	1pcs	12 WATTS	Φ180xH605mm	1.25kg±5%	
LL-R180A-1P-H2	WW,NW,W	1pcs	12 WATTS	Φ180xH1105mm	1.3kg±5%	
LL-R160A-1P-H1	WW,NW,W	1pcs	10WATTS	Φ160xH605mm	1.15kg±5%	
LL-R160A-1P-H2	WW,NW,W	1pcs	10 WATTS	Φ160xH1105mm	1.2kg±5%	
LL-R140A-1P-H1	WW,NW,W	1pcs	8 WATTS	Φ140xH605mm	1.05kg±5%	
LL-R140A-1P-H2	WW,NW,W	1pcs	8 WATTS	Φ140xH1105mm	1.1kg±5%	

B. Working Mode:


B-1. Working mode: Static color.

C. Photometric Parameters

C-1. Cadela Distribution

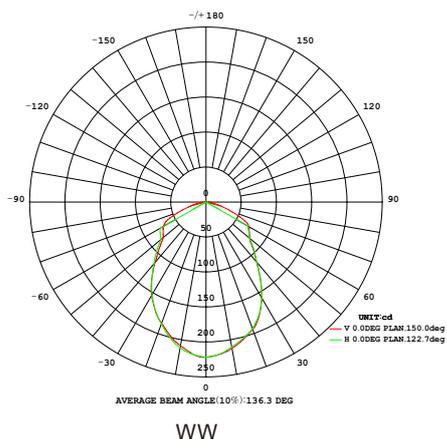


C-2. Illuminance At A Distance

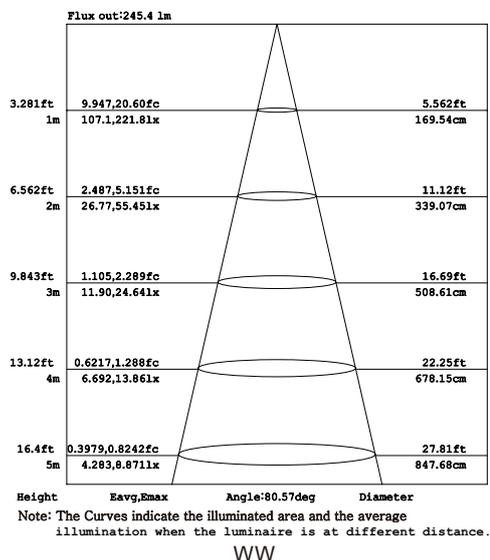

LED LAWN LIGHT


ITEM NO. : LL-R180A Series

D. Dimension Drawing:

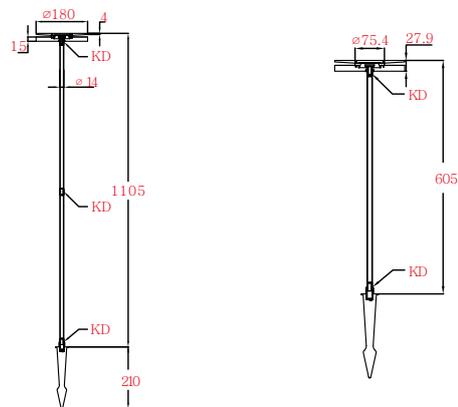


E. Installation Drawing:

E-1. Step on the pedal to install the lamp as to the lamp stand on dirt ground.

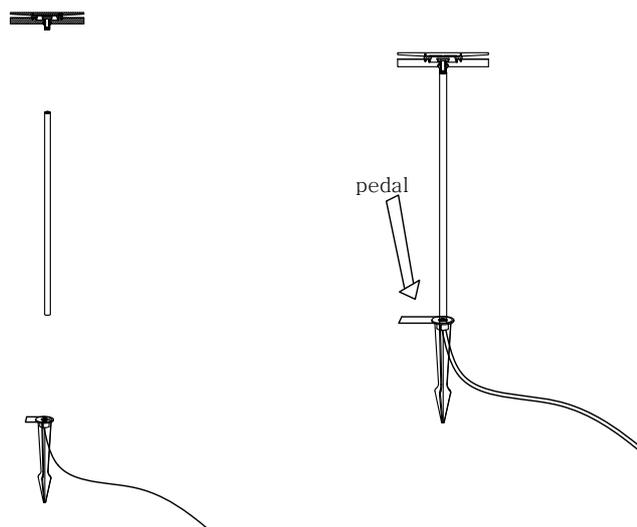

F. Connection

F-1. The power connection don't allow overloaded.

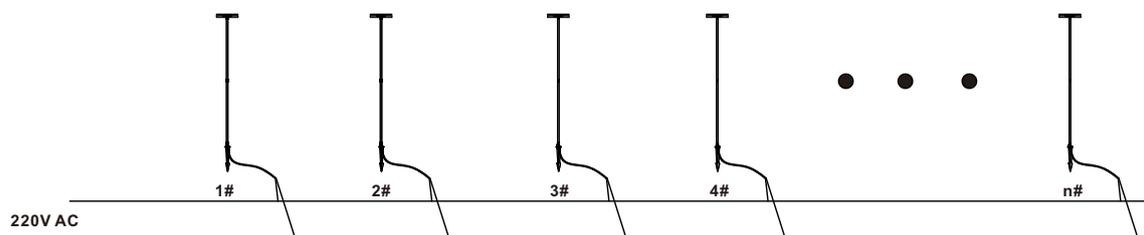

Caution:

1. Do not plug them into power when the product is still in package;
2. Don't use anything to cover the fixture during application;
3. Don't use this product in close environment;
4. If this product appears to be damaged, do not attempt any repair, please contact your dealer.

Warning:

- * Neglect on action of the above treatment will lead to failure of waterproof and proper working of the lights!!!
- * Make sure the ground connection well avoid electric shock, due to metal housing.